


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
01			Karen 12/14/15	Lucas 12/14/15	Ray 12/14/15

R&D DEPT. ISSUE  
DEC.14.2015  
ONLY FOR  
RELEASE

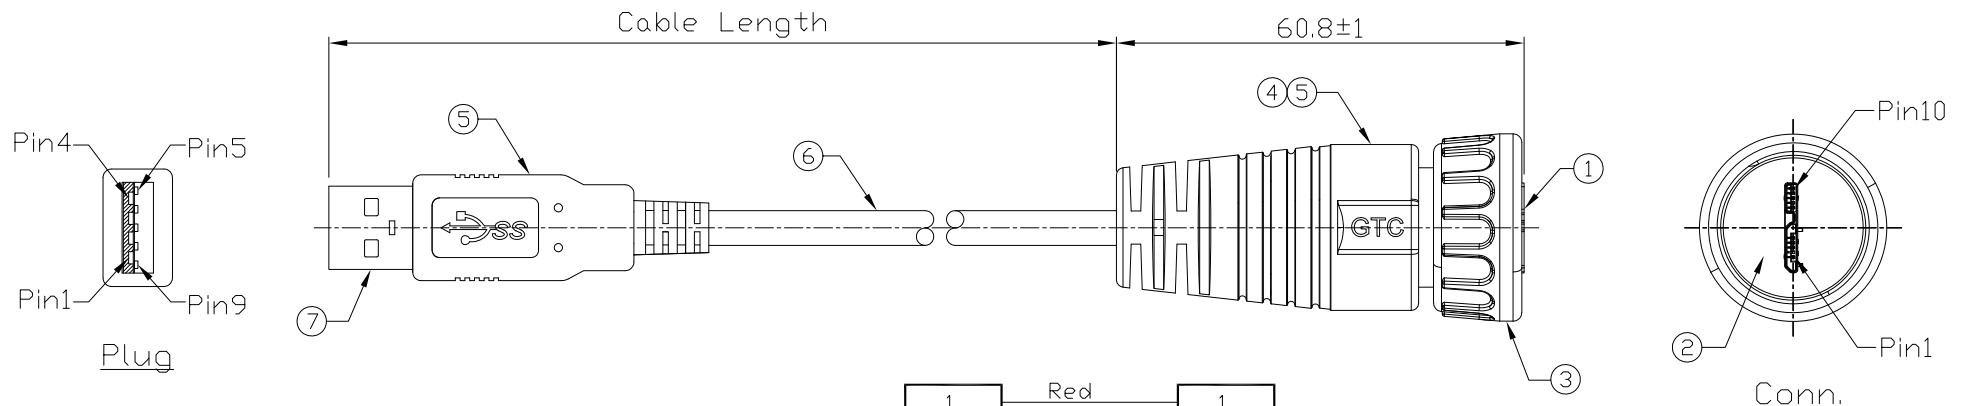

Item	Color	Item
1	Red	1
2	White	2
3	Green	3
4	Black	5
5	Blue	6
6	Yellow	7
7	Drain	8
8	Purple	9
9	Orange	10
Shell	Braid	Shell

Plug                      Conn.

Wiring Diagram

Item	Part Name	Material / Finish	Q'ty
7	USB-A 3.0 Plug	Housing: Thermoplastic, Color: Blue Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
6	Cable	UL2725 (1P*28AWG+EAM)*2+(1PR*28AWG+A)+2C*24AWG+AB 85% Color: Black, OD=5.5mm	1
5	Over Mold	PVC Color: Black	2
4	Inner Mold	Thermoplastic Color: Black	1
3	Screw Nut	Thermoplastic Color: Black	1
2	Rubber Pad	Silicone Color: Black	1
1	Micro USB-B 3.0 Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Au Plated	1

RR-119320-02-120	3048 mm	±150
RR-119320-02-78	1981 mm	±100
RR-119320-02-40	1016 mm	±50
Part No.	Cable Length	Tol.

**www.USBFireWire.com**

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USBFIREWIRE.COM THE POSSESSOR AGREES TO THE FOLLOWING:  
(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(2) NOT TO REPRODUCE OR COPY IT  
(3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(4) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.
Micro USB-B 3.0 Plastic C3 Cable End Plug Screw With USB-A 3.0 Plug						RR-119320-02-XX			01
	B	1:1	Karen 12/14/15	Lucas 12/14/15	Ray 12/14/15	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET