

Notes: (Unless Otherwise Specified)



- 1. Waterproof Rate: IP67.
- 2. Recommend Cable Diameter: 3.5~4.0 mm.
- 3. Recommend Cover Torque: 2.5~3.0 Kgf-cm.
- 4. Recommend Gland Nut Torque: 6.5~7.0 Kgf-cm.
- 5. RoHS Compliant.
- 6. 產品採用無Logo PE袋單PCS包裝 並將標籤貼於袋外

RR-1B0202_REV00X_QTY:1PCS
 LOT: XXXX
 Made in China

- 7. 每25PCS產品再用無Logo PE袋包裝 並將標籤貼於袋外

RR-1B0202_REV00X_QTY:25PCS
 LOT: XXXX
 Made in China

- 8. 標籤上的REV: 請依照成品圖面版本.
- 9. 不可使用夾鍊袋

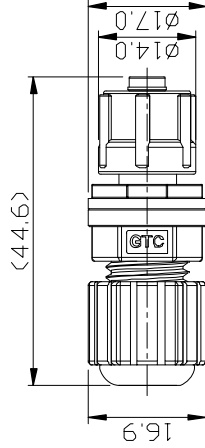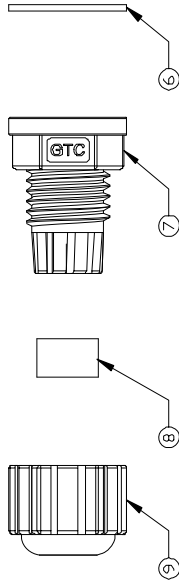

10	C-Ring	SWB Finish: Zn Plated	1
9	Gland Nut	Thermoplastic Color: Black	1
8	Gland	NBR Color: Black	1
7	Cover	Thermoplastic Color: Black	1
6	Gasket	EPDM Color: Black	1
5	Glue	Epoxy Color: Black	
4	D-Ring	Silicone Color: Red	1
3	DC Plug	Housing: Thermoplastic, Color: Black Nylon: Nylon 66, Finish: N Plated PC: Polycarbonate, Finish: N Plated PS: Polystyrene, Finish: N Plated Pb: Ferric Chloride, Finish: N Plated	1
2	Screw Nut	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty

A TITLE DC 2.5mm Field Installable Cable End Plug Screw REV. A0

DD NOT SCALE DRAWINGS	B	1:1	Joyce 10/14/15	Lucas 10/14/15	Roy 10/14/15	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET	4

www.USBFireWire.com
 NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF USBFIREWIRE.COM. THE POSSESSOR AGREES TO THE FOLLOWING:
 (C) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (D) NOT TO REPRODUCE OR COPY IT
 (E) NOT TO DISCLOSE OR PUBLISH IT IN WHOLE OR PART
 (F) ALL RIGHTS RESERVED