



PIN ASSIGNMENT

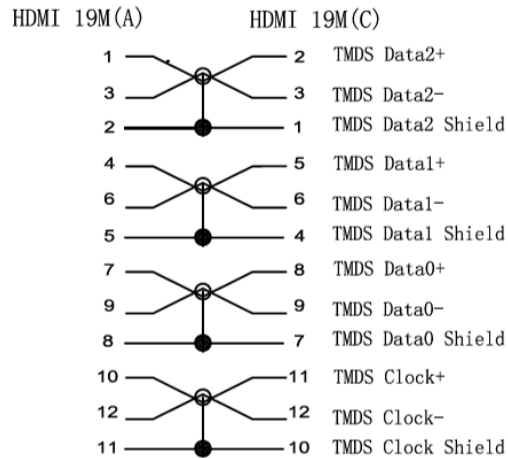

PIN ASSIGNMENT

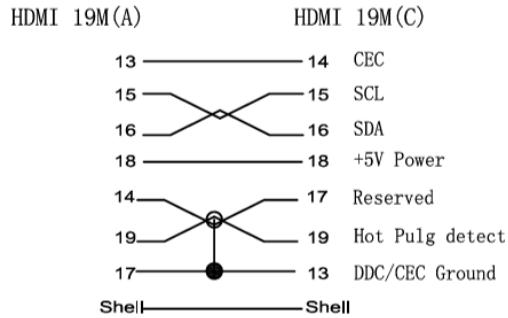

ROHS Compliant

ELECTRICAL CHARACTER:

- a. 100% OPEN & SHORT TESTING;
- b. WITHSTANDING VOLTAGE:DC 300V 0.01Sec;
- c. INSULATION RESISTANCE:5M Ohm(Min) ;
- d. CONDUCTIVE RESISTANCE:3 Ohm(Max)

| | | | | | | | | | | | | | |
|----|---|-------|------|---|--|----------|-----------|-------------|------|-------------------|----|--------------|--|
| 4 | 65P Black PVC | | | | www.USBFireWire.com | | | | | | | | |
| 3 | HDMI CF, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HCF3) | 2 | PCS | TOLERANCE OTHERWISE UNLESS SPECIFIED | DRAW: | CHECKED: | APPROVED: | TITLE | | HDMI 19P AM TO CF | | | |
| 2 | HDMI AM, BLACK INSULATION, SHELL 3U" GOLD PLATED WITH SOLDER(P/N YQT-HAM3) | 1 | PCS | | | | | UP TO 5 | ±0.2 | PART NO. | | RR-3L-5F-05G | |
| 1 | (1P*30AWG+D+AL)*5C+4C*30AWG+AL+D+B OD5.5 L=5in Black | 1 | PCS | | | | | ABOVE 5 —30 | ±0.3 | DRAW NO. | | | |
| | | | | | | | | ABOVE 30—50 | ±0.4 | DATE | | 2013-06-15 | |
| NO | Description | Q' TY | Unit | ANGLE | | | | SCALE | 1:1 | UNIT | mm | | |