



I		2011.05.13	N21105086	DESCRIPTION CONTROL			
J		2012.03.22	N21203136	REV	DESC	DATE	ECN NO.
K		2012.04.11	N21204093	G		2010.09.17	自然切换
L		2012.08.20	N21208072	H		2010.11.10	N21011073

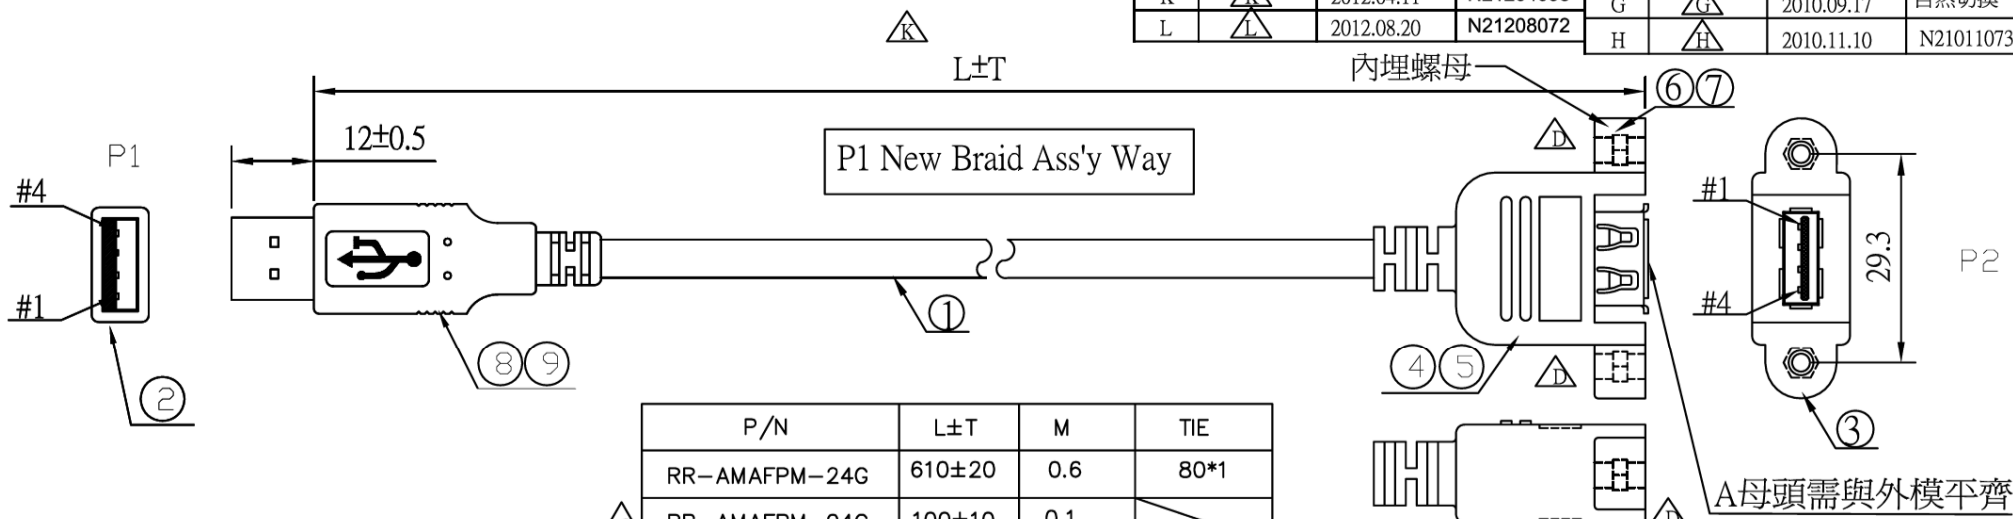


	P/N	L±T	M	TIE
	RR-AMAFPM-24G	610±20	0.6	80*1
	RR-AMAFPM-04G	100±10	0.1	
	RR-AMAFPM-12G	305±15	0.295	
	RR-AMAFPM-36G	914±20	0.904	100*1
	RR-AMAFPM-48G	1220±30	1.21	100*1

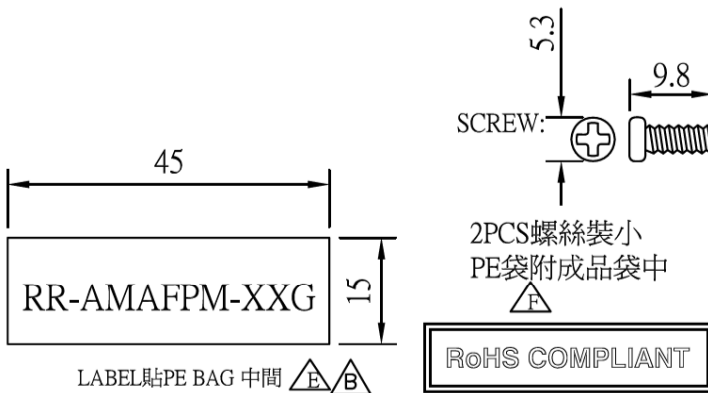

NOTE:
1. 0.1M長必須先成型母頭再成型公頭;

*	220030000363	TIE-A-BK10		***	MM
*	300030000434	PE-BAG:2.5"*2.5"*0.06MM(裝2PCS螺絲)		1	PCS
*		LABEL:"RR-AMAFPM-XXG"45*15MM		1	PCS
*	310000000012	CARTON:46*30*25CM		A/R	PCS
*	300010000001	PE BAG:30"*28"*0.08MM		A/R	PCS
*	300030000193	PE BAG:5"*6"*0.06MM		1	PCS
9	210010000328	FOIL-CU-8MM		26*1	MM
8	120010000031	PVC-BK10/50		6.8	G
7	240010700138	SRW:5.4*9.8 <全牙 4#-40UNC>		2	PCS
6	240020000008	NUTS:4.75*2.0MM<4-40UNC>		2	PCS
5	120020000001	PE-5321		3.5	G
4	120010000116	PVC-BK10/30		8	G
3	110082304028	USB-A-S<WH> <鐵殼鍍金>		1	PCS
2	180-041033-C	USB-A-P<WH> <鐵殼鍍金>		1	SET
1	1303041100003	UL2725,(1P+2C)+AB,BK10,OD:4.8 (28/24)<REV:2.0>		L	M
NO	TYPE	DESCRIPTION		QTY	UNIT

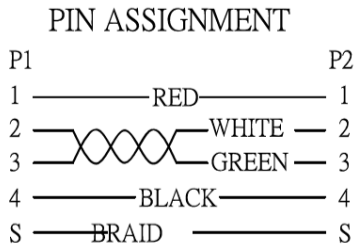

www.USBFireWire.com

	ITEM: RR-AMAFPM-XXG	REV
		L
DRAW,BY: 劉坤	SCALE: NONE	DATE: 2009-04-22
CHECK,BY:	CUSTOMER: C331<陸鴻>	PAGE: 1/1
APP,BY:	CUSTOMER P/N: RR-AMAFPM-XXG	
ALL DIMENSIONS IN mm		