

1

2

3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. RoHS Compliant.
- 3. Pack each cable in a poly bag and 25pcs in a poly bag.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Lucas 07/08/21	Lucas 07/08/21	Ray 07/08/21

RR-15222L-21101-XX\_REV:XX\_QTY:1PCS  
**LOT: XXXX**  
**Made in XXXXX**

RR-15222L-21101-XX\_REV:XX\_QTY:25PCS  
**LOT: XXXX**  
**Made in XXXXX**

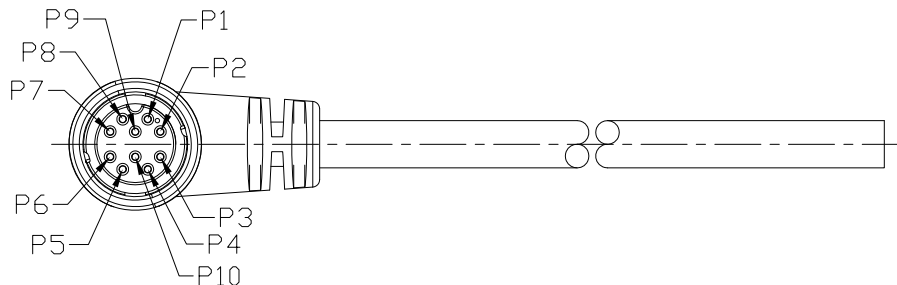

GTC  
 DOC.CENTER.ISSUE  
 JUN.17.2022  
 ONLY FOR  
 RELEASE

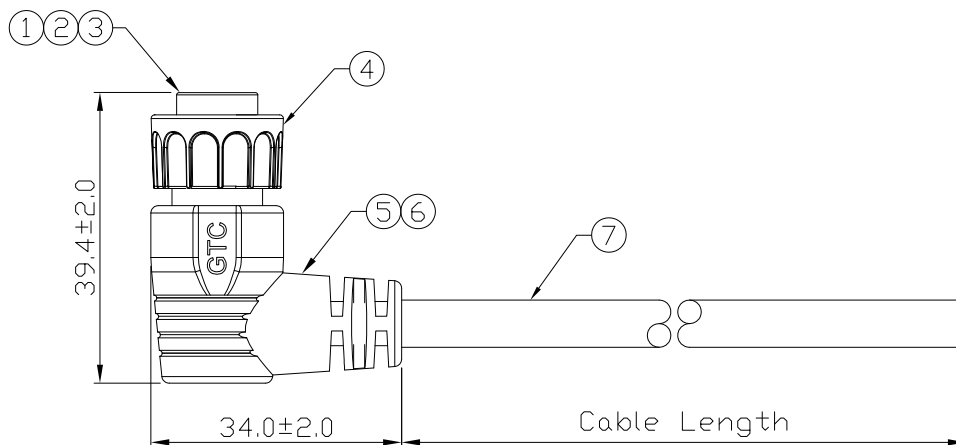

1	Brown
2	Blue
3	White
4	Green
5	Yellow
6	Gray
7	Violet
8	Red
9	Black
10	Orange

Wiring Diagram

7	Cable	UL2464 26AWG*10C+D+Al/My DD=6.0mm, Color:Black	1
6	Over Mold	PVC Color: Black	1
5	Inner Mold	Thermoplastic Color: White or Black	1
4	Lock Nut	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Contacts	Copper Alloy Finish: Au Plated	10
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

RR-15222L-21101-39	990 mm	+50
RR-15222L-21101-16	406 mm	+50
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.	
C2 2A 10P Cable End 90° Female Lock With Cable						RR-15222L-21101-XX(16,39)			A0	
	B	1:1	Lucas 07/08/21	Lucas 07/08/21	Ray 07/08/21	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

**USB FIREWIRE.com**

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4