

1

2

3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP68.
- 2. RoHS Compliant.
- 3. Pack each cable in a poly bag and 25pcs in a poly bag.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0			Jenny 06/10/22	Lucas 06/10/22	Ray 06/10/22


RR-15222R-21101-XX_REV:XX_QTY:1PCS
LOT: XXXX
Made in XXXXX

RR-15222R-21101-XX_REV:XX_QTY:25PCS
LOT: XXXX
Made in XXXXX

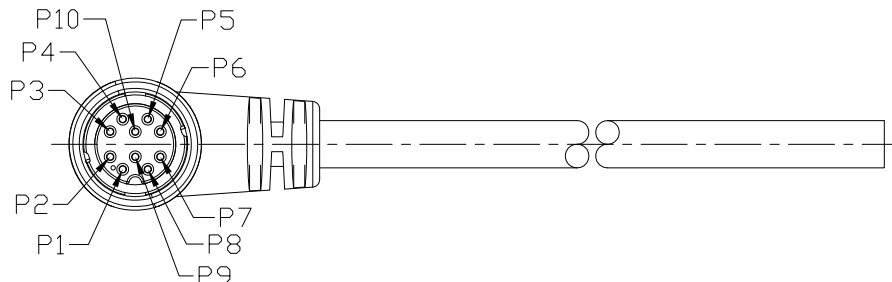

GTC
 DOC.CENTER.ISSUE
 JUN.17.2022
 ONLY FOR
 RELEASE

1	Brown
2	Blue
3	White
4	Green
5	Yellow
6	Gray
7	Violet
8	Red
9	Black
10	Orange

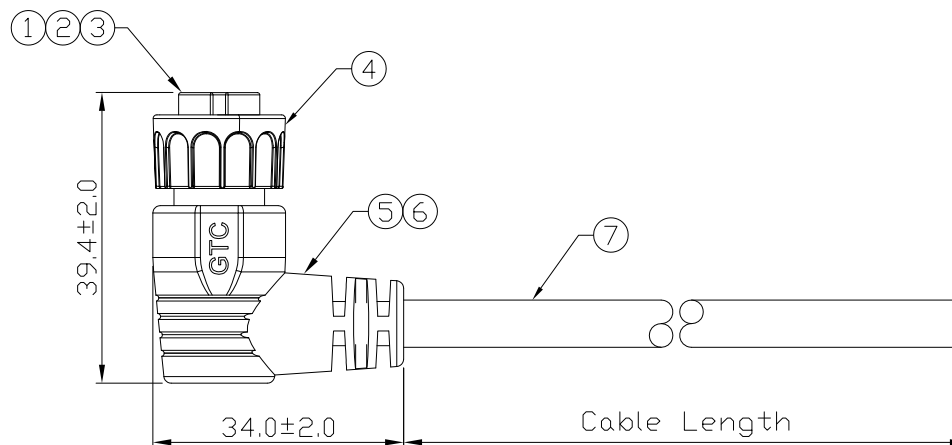

Wiring Diagram

7	Cable	UL2464 26AWG*10C+D+Al/My OD=6.0mm, Color:Black	1
6	Over Mold	PVC Color: Black	1
5	Inner Mold	Thermoplastic Color: White or Black	1
4	Lock Nut	Thermoplastic Color: Black	1
3	O-Ring	Silicone Color: Red	1
2	Contacts	Copper Alloy Finish: Au Plated	10
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty

RR-15222R-21101-39	990 mm	+50
RR-15222R-21101-16	406 mm	+50
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.	
C2 2A 10P Cable End 90° Female Lock With Cable						RR-15222R-21101-XX(16,39)			A0	
	B	1:1	Jenny 06/10/22	Lucas 06/10/22	Ray 06/10/22	X.X ± 0.5	X.XXX ± 0.05	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4