


- Notes: (Unless Otherwise Specified)
1. Waterproof Rate: IP68.
  2. Recommend Panel Thickness: 0.8 to 7.0 mm.
  3. Recommend Torque: 19~20 Kgf-cm.
  4. Mating Cap P/N: GT2C213012/GT1C5331X2.
  5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A0		Mass Production	Joyce 07/30/12	Lucas 07/30/12	Roy 07/30/12

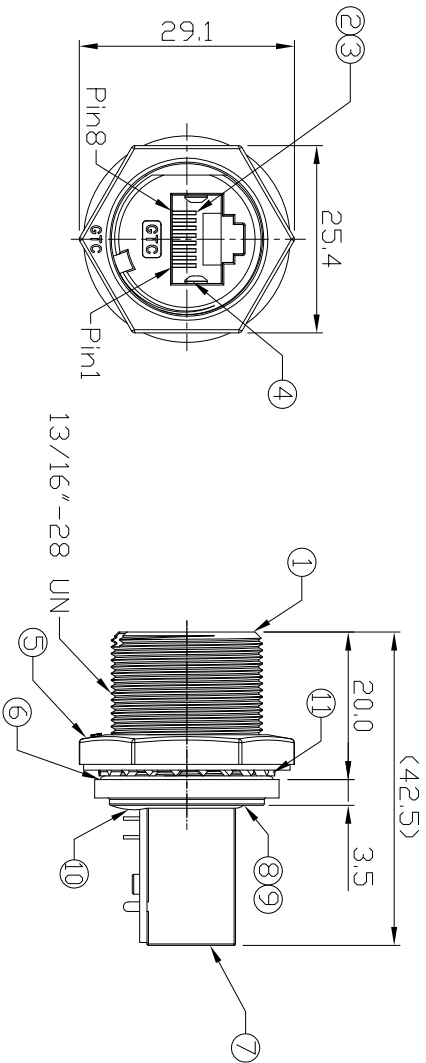

Item	Part Name	Material / Finish	Qty
11	Washer	Stainless Finish: —	1
10	Glue	Epoxy Color: Black	1
9	PCB	FR-4 Color: -	1
8	Holder	Silicone Color: Black	1
7	RJ45 Receptacle	Shell: Copper Alloy; Finish: Ni Plated Housing: Thermoplastic; Color: Black Contacts: Copper Alloy; Finish: Au Plated	1
6	O-Ring	Silicone Color: Red	1
5	Hex Nut	Zn Alloy Finish: Ni Plated	1
4	EMI Shielded Plate	Copper Alloy Finish: Ni Plated	2
3	Holder	Thermoplastic Color: Black	1
2	RJ45 Receptacle	Housing: Thermoplastic; Color: Gray Contacts: Copper Alloy; Finish: Au Plated	1
1	Housing	Zn Alloy Finish: Ni Plated	1

TITLE RJ45 Metal C3 Shielded Panel Jack Screw With RJ45 Jack

DRAWING NUMBER RR-225500-30 REV. A0

THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES	UNIT	SHEET
1	B	1:1	Joyce 07/30/12	Lucas 07/30/12	Roy 07/30/12	XX ± 0.5 XXX ± 0.2 XXXX ANGLES ± 1°	mm	1/1

GTC  
DOC.CENTER/ISSUE  
JUL.30.2012  
ONLY FOR  
RELEASE



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RE BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING:  
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE  
2. NOT TO REPRODUCE OR COPY IT  
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART