
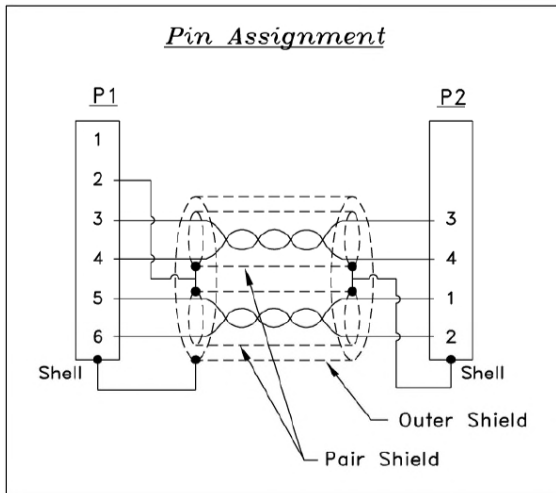



| REVISION | | | |
|----------|-------------|----------|----------|
| LTR | DESCRIPTION | DATE | APPROVED |
| A | NEW RELEASE | 04/08/99 | H.T. |

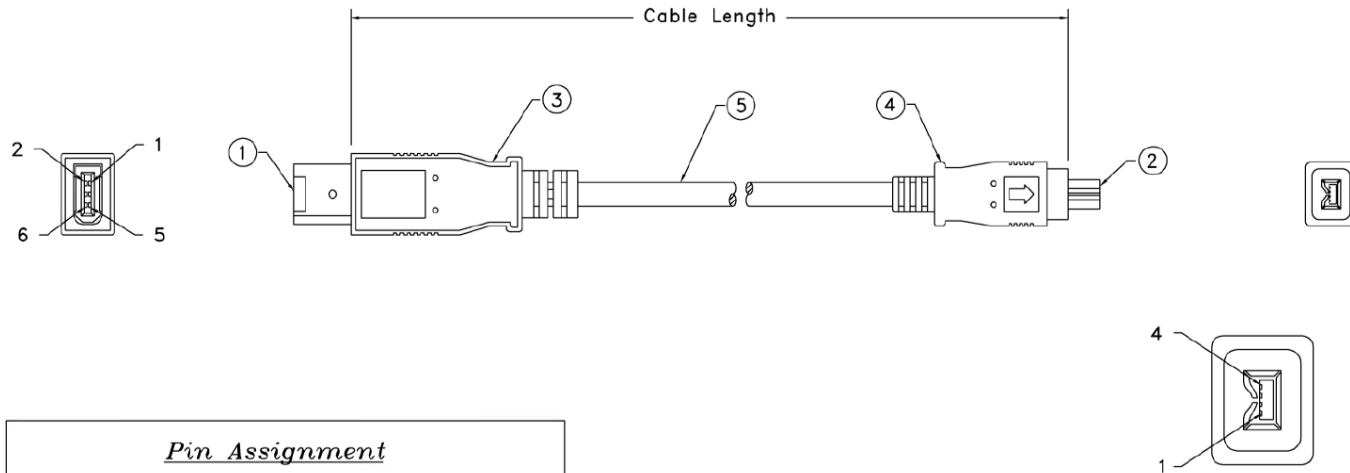

NOTE: ALL RELEVANT MATERIALS ARE COMPLIED WITH ROHS DIRECTIVE

| | | | | | | | |
|----------------------------------|---|----------|------|--|---|---|------------------|
| 5. | 28 AWG., UL20276, 2 Twisted Pair + Drain Wire, Double Shielded with AL-FOIL, Black Outer PVC jacket | XX | FT. | UNLESS OTHERWISE SPECIFIED: 1. DIMENSION ARE IN INCHS 2. TOLERANCES: DECIMALES X.XX ±0.25 3. DO NOT SCALE DRAWING 4. REMOVE ALL BURRS AND BREAK SHARP EDGES. PROPRIETARY DOCUMENT THIS DRAWING AND/OR INFORMATION OR SUBJECT MATTER CONTAINED HEREIN, SHALL NOT BE USED, COPIED OR DISSEMINATED IN ANY MANNER, OR FOR ANY PURPOSE, OTHER THAN AS EXPRESSLY STATED BY USBFIREWIRE.COM | CUSTOMER |  USBFIREWIRE.com | |
| 4. | Beige Molded PVC Hood | 1 | PCS. | | R.F.Q. NO. | | |
| 3. | Beige Molded PVC Hood | 1 | PCS. | | DRAWN DATE Howie Tseng 04/08/99 | | |
| 2. | IEEE-1394 4 Pin Male W/Gold Plating Contacts | 1 | PCS. | | CHECKED | | |
| 1. | IEEE-1394 6 Pin Male W/Gold Plating Contacts | 1 | PCS. | | CUSTOMER APPROVAL | | |
| ITEM NO. | MATERIAL / SPECIFICATION | QTY RECD | UNIT | TITLE IEEE-1394 Cable Assembly (6P/4P,4C, Molded, Color Beige) | | | |
| CABLE ASSEMBLY PARTS LIST | | | | SIZE | DWG NO. | PART NO. RR-FW-64-XX | REV. A |
| | | | | SCALE: NONE | RELEASE DATE: 04/08/99 | SHEET: 1 OF 1 | |