


DESCRIPTION CONTROL			
REV	DESC	DATE	ECN NO
D		12/03/22	自然切换
E		12/07/30	N21207143
F		12/09/03	N21209004

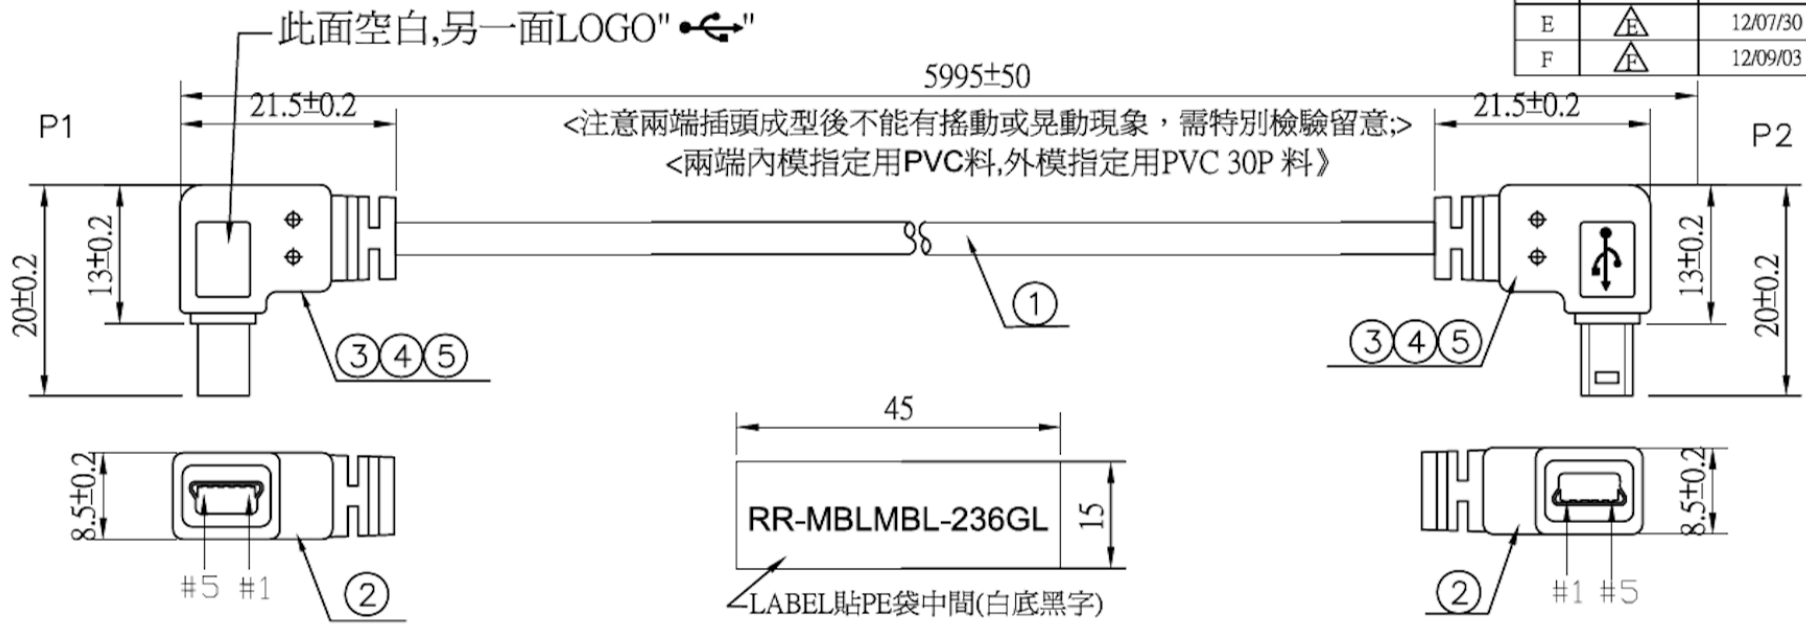

NOTE:



- 1. 單PCS包裝,PE袋貼印客戶料號貼紙.
- 2. 注意P2端插頭成型後不能有搖動或晃動現象，需特別檢驗留意；
- 3. P2端內模料指定用PVC成型; 外模指定用30P料成型;

RoHS COMPLIANT

NOTE:
REF: UB0202300X01085

*	330010015958	LABEL:45*15MM"RR-MBLMBL-236GL "	1	PCS	INNER MOLDING	USB.A359KF			
*	310000000011	CARTON:46*30*20CM	1/50	PCS	OUTER MOLDING	USB.A360KF			
*	300010000001	PE BAG:30"*28"*0.08MM	1/50	PCS					
*	300030000083	PE BAG:7"*10"*0.06MM	1	PCS					
5	120010000116	PVC-BK10/30	12.0	G					
4	200032000155	TUBE-HT-φ1.0	5.0*2	MM					
3	210030000057	HI TEAMP TAPE:W:6MM	20*2	MM					
2	110081004126	MINI-USB-B-5PIN<BK> <鍍殼鍍金> <短型一件式>	2	PCS					
1	130304110000X	UL2725,28#*1P+24#*2C+AB, BK10,OD:4.8MM<REV:2.0>	6.0	M					
NO	PART NO.	DESCRIPTION	QTY	UNIT					

DRAWN, BY: Fu Dan Xia		SCALE: NONE	DATE: 2010/05/27
CHECKED, BY:		CUSTOMER: C33k<陸鴻>	PAGE: 1/1
APP'ED, BY:		CUSTOMER P/N: RR-MBLMBL-236GL	
ALL DIMENSIONS IN mm			

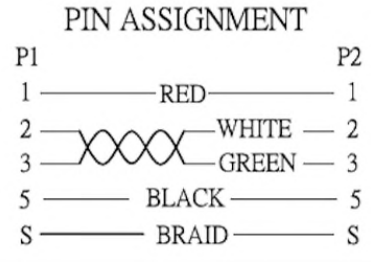

ITEM:	REV
	F