

Notes: (Unless Otherwise Specified)


1. Waterproof Rate : IP68.
2. Recommend Panel Thickness : 0.8 to 3.0 mm.
3. Recommend Torque: 9~10 Kgf-cm.
4. Mating Cap P/N: RR-1C121022.
5. RoHS Compliant.
6. UL Certification file #E364108.
7. Type C -Pin Out Is The Same As This Drawing.
8. Pack Each Cable In A Poly Bag And 25pcs In A Poly Bag.

RR-11C200-CS-XX\_REV:XX\_QTY:1PCS  
**LOT: XXXX**  
 Made in China


RR-11C200-CS-XX\_REV:XX\_QTY:25PCS  
**LOT: XXXX**  
 Made in China

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
09	ECN-210707	metal shell cover => Copper foil wrap RR-11C200-01-XX=>RR-11C200-CS-XX	Lucas 07/20/21	Lucas 07/20/21	Ray 07/20/21

GTC  
 DOC.CENTER.ISSUE  
**JUL.20.2021**  
 ONLY FOR  
 RELEASE

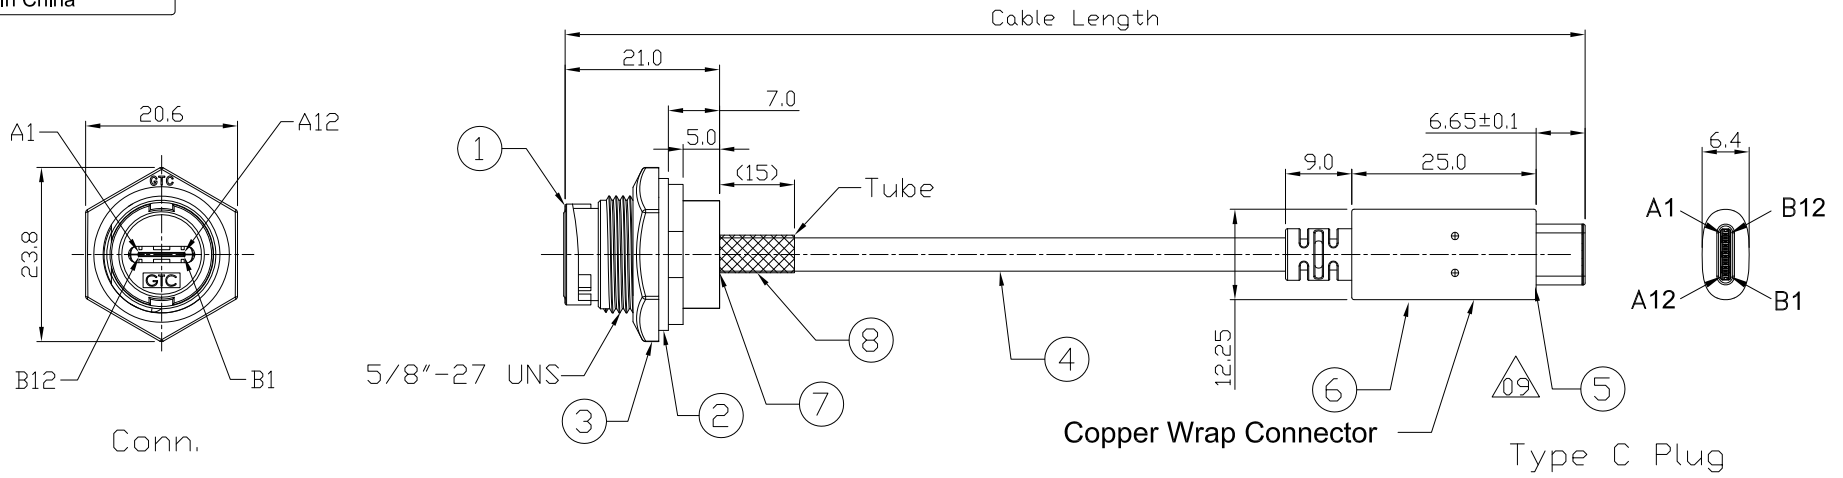

8	Shrink Tube	L=20mm, Heat Shrink Tube With Adhesive Lined Color: Black	1
7	Glue	Epoxy Color: Black	
6	Over Mold	PVC Color: Black	1
5	USB Type C 3.1	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Stainless Steel, Finish: Au Plated	1
4	Cable	UL21572 (1P/32#+EAM)*4+(1P/32#+A)+(4C/32#+)(1C/24#)+2EAB 85% OD:4.8mm BLACK TPE JACKET.	1
3	Hex Nut	Thermoplastic Color: Black	1
2	Gasket	Silicone Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Qty

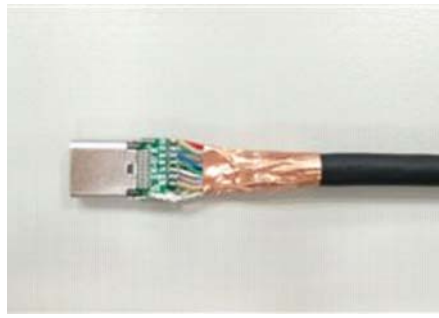

編織需跟雙面導電銅箔導通跟PCB板距離4-5mm

RR-11C200-CS-50	1270 mm	+60
RR-11C200-CS-20	508 mm	+50
RR-11C200-CS-12	305 mm	+25
RR-11C200-CS-10	254 mm	+25
RR-11C200-CS-09	229 mm	+25
RR-11C200-CS-08	203 mm	+25
RR-11C200-CS-04	102 mm	+25
Part No.	Cable Length	Tol.

TITLE						DRAWING NUMBER			REV.
USB 3.1 Type C Plastic C2 Panel Jack Lock With Type C Plug						RR-11C200-CS-XX			09
DD NOT SCALE DRAWINGS	B	1:1	Lucas 11/22/16	Lucas 11/22/16	Ray 11/22/16	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

**USB FIREWIRE.com**

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART


1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
09	ECN-210707	metal shell cover => Copper foil wrap RR-11C200-01-XX=>RR-11C200-CS-XX	Lucas 07/20/21	Lucas 07/20/21	Ray 07/20/21

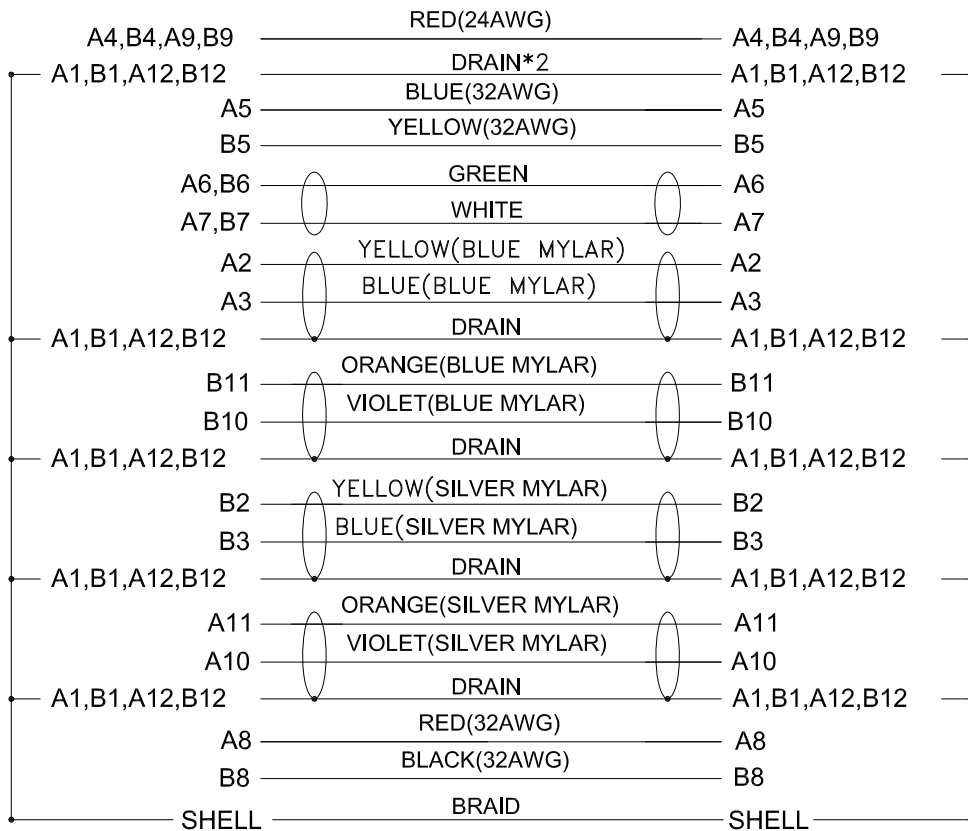

Conn.

Type C Plug

Wiring Diagram

GTC  
DOC.CENTER.ISSUE  
JUL.20.2021  
ONLY FOR  
RELEASE

TITLE USB 3.1 Type C Plastic C2 Panel Jack Lock With Type C Plug						DRAWING NUMBER RR-11C200-CS-XX			REV. 09
	B	1:1	Lucas 11/22/16	Lucas 11/22/16	Ray 11/22/16	X.X X.XX	± 0.5 ± 0.2	X.XXX ANGLES ± 1°	mm 2/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

**USB FIREWIRE.com**

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
09	ECN-210707	metal shell cover => Copper foil wrap RR-11C200-01-XX=>RR-11C200-CS-XX	Lucas 07/20/21	Lucas 07/20/21	Ray 07/20/21

\*\*\*CONSTRUCTION:

1.CABLE:

\* UL21572(1P/32#+EAM)\*4+(1P/32#+A)+(4C/32#)+(1C/24#)+2EAB 85%  
OD:4.8mm BLACK TPE JACKET.

\*\*\*CONNECTOR:

2.USB C/M:

\* USB TYPE C MALE SOLDER TYPE,PCB WITHOUT IC,  
\* PINS: 30u GOLD PLATED OVER NICKEL.  
\* INSULATOR: BLACK THEMOPLASTIC 94V-0 RATED.  
\* SHELL: STEEL WITH GOLD PALTED.  
\* CAPACITOR.  
\* MOLDED: BLACK PVC 45P.

3.USB C/F:

\* USB TYPE C FEMALE SOLDER TYPE,PCB WITHOUT IC,  
\* PINS: 30u GOLD PLATED OVER NICKEL.  
\* INSULATOR: BLACK COLOR LCP 94V-0 RATED.  
\* SHELL: STEEL WITH GOLD FLASH.

4.TEST:

\* CT: 2 ohm IS: 5M ohm



TITLE USB 3.1 Type C Plastic C2 Panel Jack Lock With Type C Plug						DRAWING NUMBER RR-11C200-CS-XX			REV. 09
	B	1:1	Lucas 11/22/16	Lucas 11/22/16	Ray 11/22/16	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	3/3
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4