
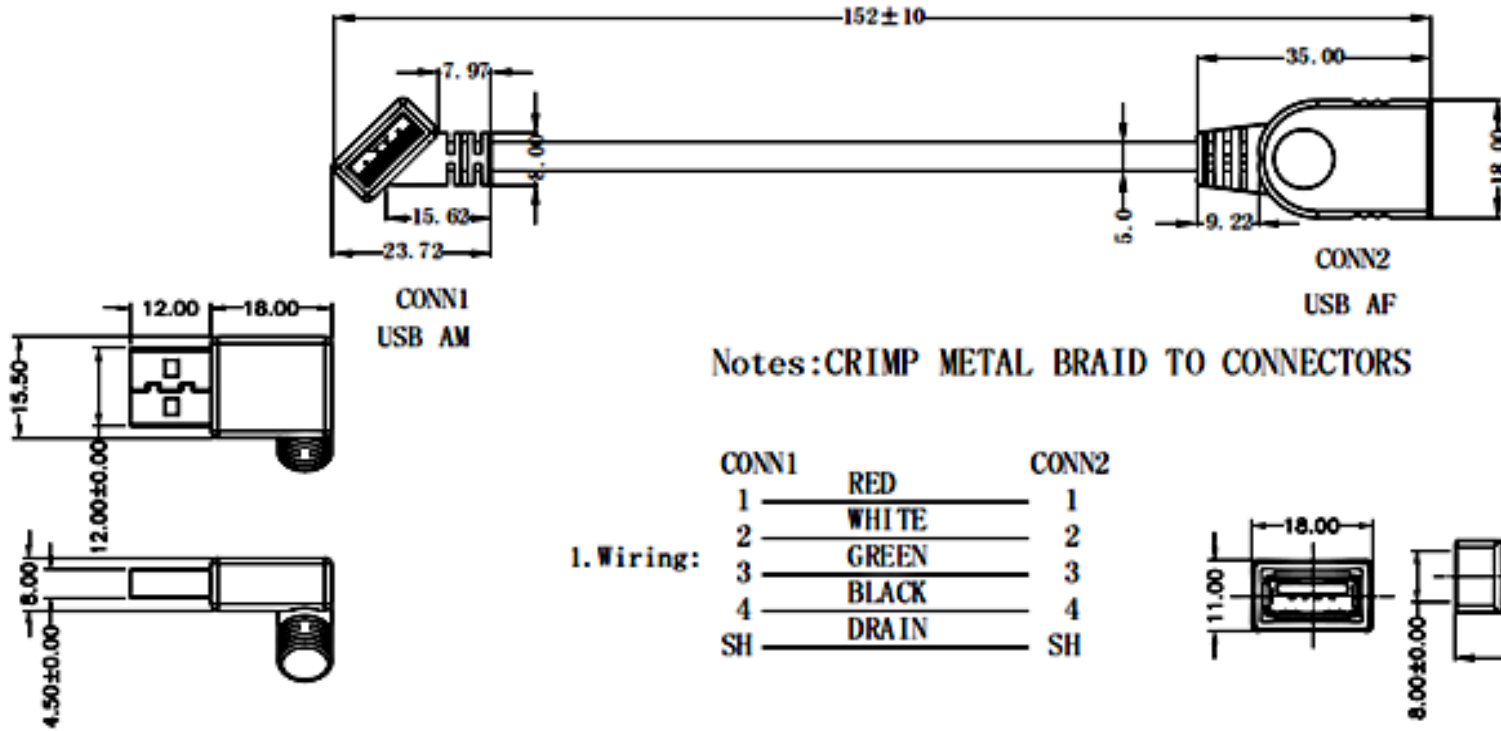


**P/N: RR-ADLAF-XXG**

**USB 2.0 Extension Cable – Down/Left Ang A Male to A Female (Enclosed) - XXinch**

NO.	DRW	DATE	REV	NOTE
1	Rain	2012/06/01	A	 <small>THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY INFORMATION OF RR-BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO MAINTAIN THIS DOCUMENT IN CONFIDENCE, NOT REPRODUCE IT OR COPY IT, AND NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART. COPYRIGHT © 2010</small>
2				

**USB AM/USB AF, COLOR:BLACK.**




**Notes:CRIMP METAL BRAID TO CONNECTORS**

**1. Wiring:**

CONN1		CONN2
1	RED	1
2	WHITE	2
3	GREEN	3
4	BLACK	4
SH	DRAIN	SH

4	49	G	PVC	45P PVC, COLOR:BLACK.
3	1	PC	CONNECTOR	USB AF, BLACK INSULATION, SHELL 30U" GOLD PLATED WITH SOLDER. (P/N:YQT-AFSG30)
2	1	PC	CONNECTOR	USB AM(SHORT TYPE), BLACK INSULATION, SHELL 30U" GOLD PLATED WITH SOLDER. (P/N:YQT-AMSG30)
1	1	PC	CABLE	UL2725(80° C 30V) 28AWG*1P+24AWG*2C+1+AL+B, OD:5.0MM, COLOR:BLACK.
NO.	Q' TY	UNIT	ITEM.	DESCRIPTION

CUSTOMER	P/N	RR-ADLAF-XXG	PAGE	1/1		
DRW	PRODUCT	RR-ADLAF-XXG	RATIO	1:1		
CHECK	SCAL		REV	B	UNIT	mm
APP	DATE	2012/06/01	Draw NO.			