

1

2



3

4


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A6	ECN-220903	IC Change To VL152C-5A	Lucas 09/05/22	Lucas 09/05/22	Ray 09/05/22

Note:

1.Type C -Pin out is the same as this drawing.

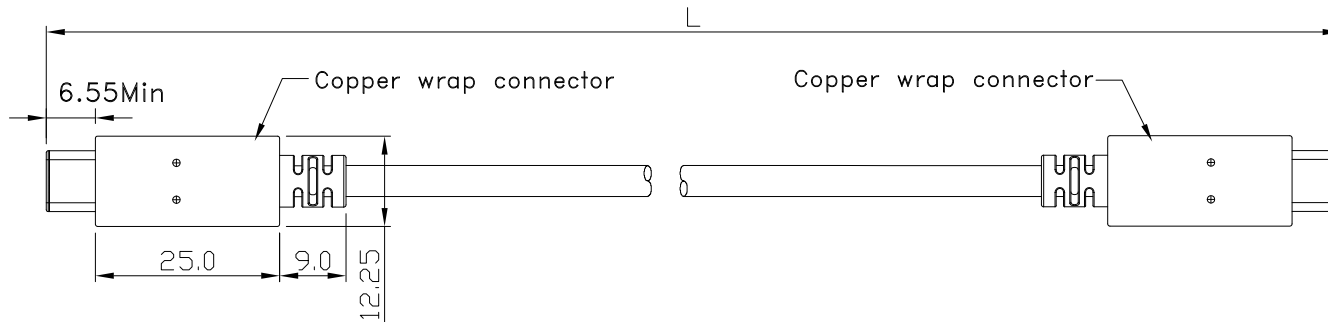

USB TYPE C M
MOLDED BLACK



P/N	LENGTH
RR-CSX2-06GRNHF	153 ⁺²⁰ ₋₀
RR-CSX2-23GRNHF	584 ⁺³⁰ ₋₀
RR-CSX2-26GRNHF	660 ⁺³⁰ ₋₀
RR-CSX2-78GRNHF	1980 ⁺⁶⁰ ₋₀
RR-CSX2-118GRNHF	2997±50
RR-CSX2-157GRNHF	3988±50
RR-CSX2-180GRNHF	4572±50
RR-CSX2-196GRNHF	4978±50
RR-CSX2-360GRNHF	9144±100

GTC
 DOC.CENTER.ISSUE
 MAY.02.2023
 ONLY FOR
 RELEASE

TITLE USB TYPE C MALE STRAIGHT ANGLE TO USB TYPE C MALE STRAIGHT ANGLE(HIGH FLEX CABLE)						DRAWING NUMBER RR-CSX2-XXGRNHF			REV. A6	
	B	1:1	Lucas 12/20/18	Lucas 12/20/18	Ray 12/20/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/4	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	



THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

1


2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A6	ECN-220903	IC Change To VL152C-5A	Lucas 09/05/22	Lucas 09/05/22	Ray 09/05/22

PIN OUT

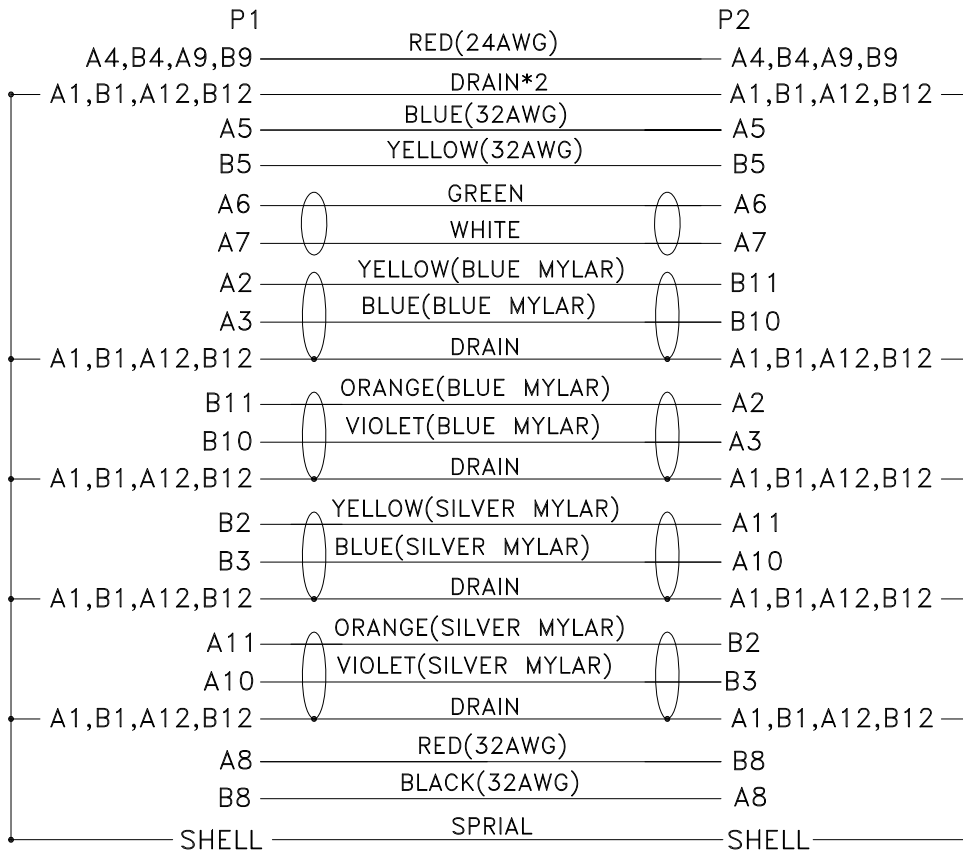

GTC
 DOC.CENTER.ISSUE
 MAY.02.2023
 ONLY FOR
 RELEASE

TITLE USB TYPE C MALE STRAIGHT ANGLE TO USB TYPE C MALE STRAIGHT ANGLE(HIGH FLEX CABLE)					DRAWING NUMBER RR-CSX2-XXGRNHF			REV. A6
--	--	--	--	--	-----------------------------------	--	--	------------

	B	1:1	Lucas 12/20/18	Lucas 12/20/18	Ray 12/20/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	2/4
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

USB FIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

1

2

3

4

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A6	ECN-220903	IC Change To VL152C-5A	Lucas 09/05/22	Lucas 09/05/22	Ray 09/05/22

***CONSTRUCTION:

1.CABLE: * UL2725(1P/32#+EAM)*4+(1P/32#+A)+(4C/32#)+(1C/24#)+2E+FEP+2S90%
OD:5.0mm BLACK PVC JACKET.

***CONNECTOR:

2.USB C/M: * USB TYPE C MALE SOLDER TYPE,PCB WITHOUT IC,
* PINS: 30u GOLD PLATED OVER NICKEL.
* INSULATOR: BLACK THERMOPLASTIC UL 94V-0.
* CAPACITOR.
* SHELL: STEEL WITH GOLD FLASH.
* MOLDED: BLACK PVC 45P.

3.USB C/M: * USB TYPE C MALE SOLDER TYPE,PCB WITH IC,
* PINS: 30u GOLD PLATED OVER NICKEL.
* INSULATOR: BLACK THERMOPLASTIC UL 94V-0.
* CAPACITOR.




* E-MARK(VL152C-5A)
* SHELL: STEEL WITH GOLD FLASH.
* MOLDED: BLACK PVC 45P.

4.TEST: * CT: 2 ohm IS: 5M ohm DC50V 0.1S.

5.PACKING: * PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.

6.MATERIAL: * MATERIAL WITH RoHS GRADE.



TITLE USB TYPE C MALE STRAIGHT ANGLE TO USB TYPE C MALE STRAIGHT ANGLE(HIGH FLEX CABLE)					DRAWING NUMBER RR-CSX2-XXGRNHF			REV. A6
--	--	--	--	--	-----------------------------------	--	--	------------

	B	1:1	Lucas 12/20/18	Lucas 12/20/18	Ray 12/20/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	3/4
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING
1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4

D

C

B

A

D

C

B

A

1

2


3

4


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A6	ECN-220903	IC Change To VL152C-5A	Lucas 09/05/22	Lucas 09/05/22	Ray 09/05/22

P/N	LENGTH(mm)	PE BAG(Inch)	PACKAGE
RR-CSX2-06GRNHF	153 ⁺²⁰ ₀	5.5*10	(1)
RR-CSX2-23GRNHF	584 ⁺³⁰ ₀	5.5*10	(2)
RR-CSX2-26GRNHF	660 ⁺³⁰ ₀	5.5*10	(2)
RR-CSX2-78GRNHF	1980 ⁺⁶⁰ ₀	5.5*10	(2)
RR-CSX2-118GRNHF	2997±50	7*10	(3)
RR-CSX2-157GRNHF	3988±50	7*10	(3)
RR-CSX2-180GRNHF	4572±50	7*10	(3)
RR-CSX2-196GRNHF	4978±50	7*10	(3)
RR-CSX2-360GRNHF	9144±100	13*15	(3)

PE BAG LABEL

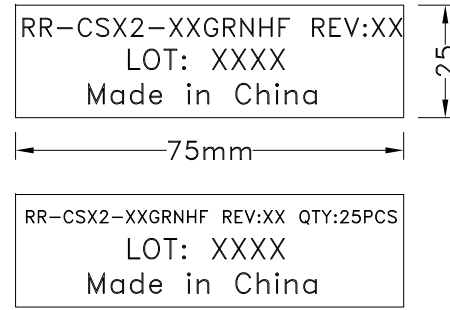


RoHS LABEL

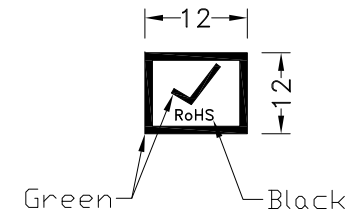


NOTES:PACK EACH CABLE IN A POLY BAG AND 25PCS IN A POLY BAG.


PACK(1)




PACK(2)




PACK(3)



GTC
DOC.CENTER.ISSUE
MAY.02.2023
ONLY FOR
RELEASE

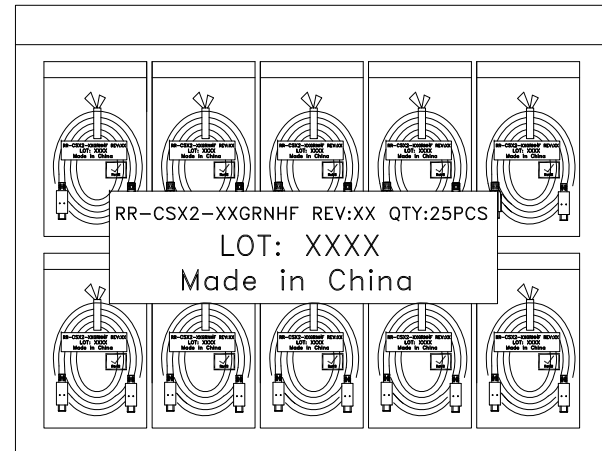

TITLE					DRAWING NUMBER			REV.
USB TYPE C MALE STRAIGHT ANGLE TO USB TYPE C MALE STRAIGHT ANGLEHIGH FLEX CABLE)					RR-CSX2-XXGRNHF			A6
DO NOT SCALE DRAWINGS	B	1:1	Lucas 12/20/18	Lucas 12/20/18	Ray 12/20/18	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm 4/4
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT SHEET


USBFIREWIRE.com

THE INFORMATION CONTAINED HEREIN IS PROPRIETARY AND CONFIDENTIAL TO RR BUSINESS VENTURES, LLC. THE POSSESSOR AGREES TO THE FOLLOWING

1. MAINTAIN THIS DOCUMENT IN CONFIDENCE
2. NOT TO REPRODUCE OR COPY IT
3. NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART

1

2

3

4